

Product Catalog Jacks

(Information and links also available in product sections of website.)

Jacks

- Marine
- A-Frame
- A-Frame Accessories
- Weld On Bracket
- Pipe-mount
- Weld On Square Tube
- Stabilizer
- Electric A Frame

Replacement Parts



1000lb Capacity Marine Jack





Ideal for use with boat, sport craft, snowmobile and other recreational trailers.

- •1,000lb Support/Lift Capacity
- •Large 1/2" pull pin to activate the swivel mechanism
- •Large grooved comfort handle to operate the jack
- •Single bolt through design with large washer for side load support
- •Durable clear zinc finish (2 1/8" outer tube construction)
- •Bolt on hardware included to mount from 2"x2" to 3"x5" trailer frame
- •Single 6" poly caster wheel
- •10" travel distance
- •24" jack height fully retracted
- •13-1/2" bracket height (from bottom of jack to center of swivel when fully retracted)
- •MJ-1206B
- •MJ-1206BBX Retail Boxed (available special order upon request)



1000lb Capacity Marine Jack (Weld On Version)




Ideal for use with boat, sport craft, snowmobile and other recreational trailers.

- •1,000lb Support/Lift Capacity
- •Large 1/2" pull pin to activate the swivel mechanism
- •Large grooved comfort handle to operate the jack
- Snap ring design with raw weldon bracket
- •Durable clear zinc finish (2 1/8" outer tube construction)
- •Single 6" poly caster wheel
- •10" travel distance
- •24" jack height fully retracted
- •13-1/2" bracket height (from bottom of jack to center of swivel when fully retracted)
- •MJ-1000W



1200lb Capacity Marine Jack





- •1,200lb Support/Lift Capacity
- •Large 1/2" pull pin to activate the swivel mechanism
- ·Large grooved comfort handle to operate the jack
- •Four bolt pin through design with large diamond shaped washer for side load support
- •Durable clear zinc finish (2 1/8" outer tube construction)
- Bolt on hardware included to mount from 2"x2" to 3"x5" trailer frame
- •Single 6" poly caster wheel
- •10" travel distance
- •24" jack height fully retracted
- •13-1/2" bracket height (from bottom of jack to center of swivel when fully retracted)
- •MJ-1200B
- •MJ-1200BBX Retail Boxed (available special order upon request)





www.ramtrailerproducts.com



1500lb Capacity Marine Jack




Ideal for use with boat, sport craft, snowmobile and other recreational trailers.

- •1,500lb Support/Lift Capacity
- •Large 1/2" pull pin to activate the swivel mechanism
- •Large grooved comfort handle to operate the jack
- •Four bolt pin through design with large diamond shaped washer for side load support
- •Durable clear zinc finish (2 1/4" outer tube construction)
- •Bolt on hardware included to mount from 2"x2" to 3"x5" trailer frame
- •Single 8" poly caster wheel
- •10" travel distance
- •26" jack height fully retracted
- •13-1/2" bracket height (from bottom of jack to center of swivel when fully retracted)
- •MJ-1500B



1500lb Capacity Marine Jack (Dual Wheel)

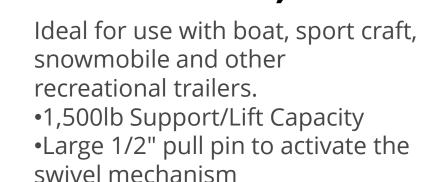

- •Large grooved comfort handle to operate the jack
- •Four bolt pin through design with large diamond shaped washer for side load support
- •Durable clear zinc finish (2 1/4" outer tube construction)
- •Bolt on hardware included to mount from 2"x2" to 3"x5" trailer frame
- •Dual 6" poly caster wheels
- •10" travel distance
- •26" jack height fully retracted
- •12-1/2" bracket height (from bottom of jack to center of swivel when fully retracted)
- •MJ-1500B-DWL Bulk





2500lb Capacity Marine Jack





Ideal for use with boat, sport craft, snowmobile and other recreational trailers.

- •2,500lb Support/Lift Capacity
- •Large grooved comfort handle to operate the jack
- •2-1/4" outside square tube construction
- •Grease zerk for easy greasing of jack
- Durable clear zinc finish
- •Bolt on hardware included to mount from 2"x2" to 3"x5" trailer frame
- •15" travel distance
- •24-3/4" jack height fully retracted
- •7-1/4" bracket height (from bottom of jack to center of swivel when fully retracted)
- •3-3/4"x7-1/2" sand foot with drop leg adds 13-3/4" of adjustability
- •MJSQ-2500B



5000lb Capacity Marine Jack



Ideal for use with larger boat trailers.

- •5,000lb Support/Lift Capacity
- •Large grooved comfort handle to operate the jack
- •2-1/2" outside square tube construction
- •Grease zerk for easy greasing of jack
- Durable clear zinc finish
- •Bolt on application with 5" x 7 1/2" mounting plate for up to 6" tall trailer frames (four 1/2" bolts/nuts and two mounting straps for mounting to trailer frame included)
- •1/2" holes spaced in 1" increments
- •15" travel distance
- •24-3/4" jack height fully retracted, 53" fully extended
- •6" x 8" sand foot with drop leg adds 13-3/4" of adjustability
- •MJSQ-5000B (available special order upon request)



STRONG & RELABLE P. John throat like in the Autory 3000s Sept Seption 2000s Lett Copacity Into an interest in the Autory Man the fact in the Autory Man the Auto

2000lb Capacity Topwind A Frame Jack

- •3,000lb Support Capacity / 2,000lb Lift Capacity
- Large grooved comfort handle to operate the jack
- •Durable exterior grade black finish on outer and inner tubes (clear zinc model also available) (2 1/4" outer tube construction)
- •Handle arm durable zinc finish
- •TJA-2000-B 14" travel distance, 8.25" bracket height from bottom of jack to bolt flange, 21.25" jack height when fully retracted
- •TJA-2000-Z 14" travel distance, 8.25" bracket height from bottom of jack to bolt flange, 21.25" jack height when fully retracted – clear zinc outer and inner tubes
- •TJA-2001-B 14" travel distance, 5" bracket height from bottom of jack to bolt flange, 21.25" jack height when fully retracted
- •TJA-2002-B 15" travel distance, 9.25" bracket height from bottom of jack to bolt flange, 24.25" jack height when fully retracted



2000lb Capacity Topwind A Frame Jack



- •3,000lb Support Capacity / 2,000lb Lift Capacity
- •Round knob handle design
- •Durable exterior grade black finish on outer and inner tubes (2 1/4" outer tube construction)
- •Handle arm durable zinc finish
- •TJA-2006-B 14" travel distance, 8.25" bracket height from bottom of jack to bolt flange, 21.25" jack height when fully retracted



2000lb Capacity Sidewind A Frame Jack



- •3,000lb Support Capacity / 2,000lb Lift Capacity
- •Large grooved comfort handle to operate the jack
- •Durable exterior grade black finish on outer and inner tubes (2 1/4" outer tube construction)
- •Handle arm durable zinc finish
- •TJA-2000S / TJA-2001S-B 14.5" travel distance, 9.25" bracket height from bottom of jack to bolt flange, 25" jack height when fully retracted



2000lb Capacity Sidewind A Frame Jack (Exterior Gear Box Style)



- •3,000lb Support Capacity / 2,000lb Lift Capacity
- •Large grooved comfort handle to operate the jack
- •Grease zerk for easy greasing of jack
- •Durable exterior grade black finish on outer and inner tubes (2 1/4" out tube construction)
- •Handle arm durable zinc finish
- •TJA-2100S-B 15" travel distance, 9.25" bracket height from bottom of jack to bolt flange, 23" jack height when fully retracted (available special order upon request)



5000lb Capacity Topwind A Frame Jack



- •5,000lb Support Capacity / 3,000lb Lift Capacity
- •Large grooved comfort handle to operate the jack
- •Durable exterior grade black finish on outer and inner tubes (2 1/4" outer tube construction)
- •Handle arm durable zinc finish
- •TJA-5000-B 14" travel distance, 10.5" bracket height from bottom of jack to bolt flange, 21.25" jack height when fully retracted



5000lb Capacity Topwind A Frame Jack (Taller Version)



- •5,000lb Support Capacity / 3,000lb Lift Capacity
- •Comfortable claw knob and clear zinc solid bar handle that can be folded away when not in use
- •Durable exterior grade black finish on outer and inner tubes (clear zinc model also available) (2 1/4" outer tube construction)
- •TJA-5000T-B 15" travel distance, 10" bracket height from bottom of jack to bolt flange, 22.75" jack height when fully retracted
- •TJA-5000T-Z 15" travel distance, 10" bracket height from bottom of jack to bolt flange, 22.75" jack height when fully retracted – clear zinc outer and inner tubes



5000lb Capacity Sidewind A Frame Jack (Exterior Gear Box Style)



- •5,000lb Support Capacity / 3,000lb Lift Capacity
- Large grooved comfort handle to operate the jack
- •Durable exterior grade black finish on outer and inner tubes (2 1/4" outer tube construction)
- •Handle arm durable zinc finish
- •TJA-5000S-B 14.5" travel distance, 9" bracket height from bottom of jack to bolt flange, 25" jack height when fully retracted



A Frame Jack Accessories



For use with any RAM A-Frame Jack

- Durable zinc finish
- •Includes bolt and nyloc nut to secure to the bottom of an a-frame jack
- •Two weep holes in the bottom of the sand foot for water drainage
- •2,000 lb capacity
- •2-1/4" x 4-1/2" foot size
- •|F-99



For use with any RAM A-Frame Jack

- •Includes mounting clip assembly to secure to the bottom of an a-frame jack
- •1.7" tall
- •4-1/2" x 6-1/4" foot size
- •2,000 lb capacity
- •JF-100-Z / JF-100-Z-1020 durable zinc finish
- •JF-100-B-1020 durable black powder coat finish



For use with any RAM A-Frame Jack

- •Includes mounting clip assembly to secure to the bottom of an a-frame jack
- •8.5" tall
- •4-1/2" x 6-1/4" foot size
- •2,000 lb capacity
- •JF-101 durable zinc finish



A Frame Jack Accessories (Continued)



For use with 2K top wind RAM A-Frame Jacks

- •Includes mounting clip assembly to secure to the bottom of an a-frame jack
- •9.5" tall, five position adjustability
- •5-1/4" diameter foot with weep holes for water drainage
- •2,000 lb capacity
- •JF-1005H-Z durable zinc finish



For use with any RAM A-Frame Jack

- Durable zinc finish
- •Includes mounting clip assembly to secure to the bottom of an a-frame jack
- •6" wheel assembly
- •1,200 lb capacity
- •JC-101 poly wheel construction (shown in photo)
- •JC-102 steel wheel construction



Bottom Support Plate

- •Raw finish to be welded on the underside of an a frame coupler
- •2.29" hole for a frame jack outer tube to pass through when installing
- •Additional side load support for an a frame jack application
- •JSP-100



2000lb Capacity Topwind Weld On Jack



- •3,000lb Support Capacity / 2,000lb Lift Capacity
- •Comfortable claw knob and clear zinc solid bar handle that can be folded away when not in use
- •Large 1/2" pull pin to activate the swivel mechanism
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and foot (2 1/4" outer tube construction)
- •Grease zerk for easy greasing of jack
- •Deep seated snap ring for side load support and raw weld on bracket
- •3-3/4"x7-1/2" welded on durable zinc sand foot
- •TJB-2001-B 10" travel distance, 11" bracket height from bottom of jack to center of swivel mount, 16.75" jack height when fully retracted
- •TJB-2001-Z 10" travel distance, 11" bracket height from bottom of jack to center of swivel mount, 16.75" jack height when fully retracted zinc outer and inner tube
- •TJB-2002-B 15" travel distance, 16" bracket height from bottom of jack to center of swivel mount, 22" jack height when fully retracted



2000lb Capacity Sidewind Weld On Jack



- •3,000lb Support Capacity / 2,000lb Lift Capacity
- •Large grooved comfort handle to operate the jack
- •Large 1/2" pull pin to activate the swivel mechanism
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and foot (2 1/4" outer tube construction)
- •Grease zerk for easy greasing of jack
- Deep seated snap ring for side load support and raw weld on bracket
- •3-3/4"x7-1/2" welded on durable zinc sand foot
- •TJB-2001S-B 10" travel distance, 10" bracket height from bottom of jack to center of swivel mount, 17.75" jack height when fully retracted
- •TJB-2002S-B 15" travel distance, 15.25" bracket height from bottom of jack to center of swivel mount, 22.75" jack height when fully retracted



2000lb Capacity Topwind Pipemount Jack

"The Best Overall Value In The Industry"



- •3,000lb Support Capacity / 2,000lb Lift Capacity
- •Comfortable claw knob and clear zinc solid bar handle that can be folded away when not in use
- •9/16" pin and lanyard assembly affixed to the jack
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and foot (2 1/4" outer tube construction)
- •Grease zerk for easy greasing of jack
- •Includes a 2" raw round weld on mating pipe
- •3-3/4"x7-1/2" welded on durable zinc sand foot
- •TJP-2001-B 10" travel distance, 11" bracket height from bottom of jack to center of swivel mount, 17" jack height when fully retracted
- •TJP-2002-B 15" travel distance, 16" bracket height from bottom of jack to center of swivel mount, 22" jack height when fully retracted



2000lb Capacity Sidewind Pipemount Jack



- •3,000lb Support Capacity / 2,000lb Lift Capacity
- •Large grooved comfort handle to operate the jack
- •9/16" pin and lanyard assembly affixed to the jack
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and foot (2 1/4" outer tube construction)
- •Grease zerk for easy greasing of jack
- •Includes a 2" raw round weld on mating pipe
- •3-3/4"x7-1/2" welded on durable zinc sand foot
- •TJP-2001S-B 10" travel distance, 10" bracket height from bottom of jack to center of swivel mount, 17.5" jack height when fully retracted
- •TJP-2002S-B 15" travel distance



5000lb Capacity Topwind Pipemount Jack





- •5,000lb Support Capacity / 3,000lb Lift Capacity
- •Comfortable claw knob and clear zinc solid bar handle that can be folded away when not in use
- •9/16" pin and lanyard assembly affixed to the jack
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and foot (2 1/4" outer tube construction)
- •Grease zerk for easy greasing of jack
- •Includes a 2" raw round weld on mating pipe
- •3-3/4"x7-1/2" welded on durable zinc sand foot
- •TJP-5001-B 10" travel distance, 11" bracket height from bottom of jack to center of swivel mount, 17" jack height when fully retracted
- •TJP-5002-B 15" travel distance, 16" bracket height from bottom of jack to center of swivel mount, 22" jack height when fully retracted



5000lb Capacity Sidewind Pipemount Jack



- •5,000lb Support Capacity / 3,000lb Lift Capacity
- •Large grooved comfort handle to operate the jack
- •5/8" pin and lanyard assembly affixed to the jack
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and foot (2 1/4" outer tube construction)
- •Grease zerk for easy greasing of jack
- •Includes a 2" raw round weld on mating pipe
- •3-3/4"x7-1/2" welded on durable zinc sand foot
- •TJP-5001S-B 10" travel distance, 10" bracket height from bottom of jack to center of swivel mount, 17.5" jack height when fully retracted
- •TJP-5002S-B 15" travel distance, 15.25" bracket height from bottom of jack to center of swivel mount, 22.75" jack height when fully retracted



8000lb Capacity Topwind Pipemount Jack



- •8,000lb Support Capacity / 7,000lb Lift Capacity
- •Comfortable claw knob and clear zinc solid bar handle that can be folded away when not in use
- •5/8" pin and lanyard assembly affixed to the jack
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and foot (2 1/4" outer tube construction)
- •Grease zerk for easy greasing of jack
- •Includes a heavy duty 3" raw round weld on mating pipe
- •6"x8" welded on durable zinc sand foot
- •TJP-7001-B 10" travel distance 10" bracket height from bottom of jack to center of swivel mount, 19.75" jack height when fully retracted (available special order jack upon request)
- •TJP-7002-B 15" travel distance, 15.25" bracket height from bottom of jack to center of swivel mount, 24.25" jack height when fully retracted (available special order jack upon request)



8000lb Capacity Sidewind Pipemount Jack



- •8,000lb Support Capacity / 7,000lb Lift Capacity
- •Large grooved comfort handle to operate the jack
- •5/8" pin and lanyard assembly affixed to the jack
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and foot (2 1/4" outer tube construction)
- •Grease zerk for easy greasing of jack
- •Includes a heavy duty 3" raw round weld on mating pipe
- •6"x8" welded on durable zinc sand foot
- •TJP-7001S-B 10" travel distance 10" bracket height from bottom of jack to center of swivel mount, 21.5" jack height when fully retracted (available special order jack upon request)
- •TJP-7002S-B 15" travel distance, 15.25" bracket height from bottom of jack to center of swivel mount, 24.25" jack height when fully retracted (available special order jack upon request)



5000lb Capacity Topwind Square Tube Jack



- •5,000lb Support Capacity / 3,000lb Lift Capacity
- •Comfortable claw knob and clear zinc solid bar handle that can be folded away when not in use
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and drop leg foot
- •2-1/4" square outer tube construction
- •Grease zerk for easy greasing of jack
- •3-3/4"x7-1/2" welded on durable zinc sand foot
- •Drop leg adds 13.75" of adjustability (TJD-5000 model)
- •TJD-5000 15" travel distance, 25.25" jack height when fully retracted, drop leg direct weld version
- •TJD-5000-FLB 15" travel distance, 24.75" jack height when fully retracted, fixed leg version (available special order upon request)
- •TJDP-5000-FLB 15" travel distance, 15" bracket height from bottom of jack to center of swivel mount, 24.75" jack height when fully retracted, fixed leg pipe mount version (available special order upon request)



5000lb Capacity Sidewind Square Tube Jack



- •5,000lb Support Capacity / 3,000lb Lift Capacity
- •Large grooved comfort handle to operate the jack
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and drop leg foot
- •2-1/4" square outer tube construction
- •Grease zerk for easy greasing of jack
- •3-3/4"x7-1/2" welded on durable zinc sand foot
- •Drop leg adds 13.75" of adjustability (TJD-5000S model)
- •TJD-5000S 15" travel distance, 24.5" jack height when fully retracted, drop leg direct weld version, top style similar to MJSQ-2500B marine jack
- •TJD-5100S 15" travel distance, 24.5" jack height when fully retracted, drop leg direct weld version, dog house style top (available special order upon request)
- •TJD-5000S-FLB 15" travel distance, 24.5" jack height when fully retracted, fixed leg version, dog house style top (available special order upon request) •TJDP-5000S-FLB 15" travel distance, 15.75" bracket height from bottom of jack to center of swivel mount, 24.75" jack height when fully retracted, fixed leg pipe mount version, dog house style top



8000lb Capacity Topwind Square Tube Jack (Standard Series)



- •8,000lb Support Capacity / 7,000lb Lift Capacity
- •Comfortable claw knob and clear zinc solid bar handle that can be folded away when not in use
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and drop leg foot
- •2-1/2" square outer tube construction
- •Grease zerk for easy greasing of jack
- •6"x8" welded on durable zinc sand foot
- •Drop leg adds 13.75" of adjustability (TJD-7000 model and TJDP-7000-B)
- •TJD-7000 15" travel distance, 25.25" jack height when fully retracted, drop leg direct weld version
- •TJDP-7000-B 15" travel distance, 14.5" bracket height from bottom of jack to center of swivel mount, 25.5" jack height when fully retracted, drop leg pipe mount version (special order available upon request)
- •TJDP-7000-FLB 15" travel distance, 16.5" bracket height from bottom of jack to center of swivel mount, 25.5" jack height when fully retracted, fixed leg pipe mount version (special order available upon request)



8000lb Capacity Sidewind Square Tube Jack (Standard Series)



- •8,000lb Support Capacity / 7,000lb Lift Capacity
- •Large grooved comfort handle to operate the jack
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and drop leg foot
- •2-1/2" square outer tube construction
- •Grease zerk for easy greasing of jack
- •6"x8" welded on durable zinc sand foot
- •Drop leg adds 13.75" of adjustability (TJD-7000S and TJDP-7000S-B models)
- •TJD-7000S 15" travel distance, 25.5" jack height when fully retracted, drop leg direct weld version
- •TJDP-7000S-B 15" travel distance, 14.5" bracket height from bottom of jack to center of swivel mount, 25.5" jack height when fully retracted, drop leg pipe mount version
- •TJDP-7000S-FLB 15" travel distance, 14.5" bracket height from bottom of jack to center of swivel mount, 25.5" jack height when fully retracted, fixed leg pipe mount version



8000lb Capacity Topwind Square Tube Jack (Select Series)



- •8,000lb Support Capacity / 7,000lb Lift Capacity
- •Comfortable claw knob and clear zinc solid bar handle that can be folded away when not in use
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and drop leg foot
- •2-1/4" square outer tube construction
- •Grease zerk for easy greasing of jack
- •6"x8" welded on durable zinc drop leg sand foot
- •Drop leg adds 13.75" of adjustability
- •TJD-8000 15" travel distance, 25.25" jack height when fully retracted, drop leg version
- •TJDA-8000 a frame mount version also available special order



8000lb Capacity Sidewind Square Tube Jack (Select Series)



- •8,000lb Support Capacity / 7,000lb Lift Capacity
- •Large grooved comfort handle to operate the jack
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and drop leg foot
- •2-1/4" square outer tube construction
- •Grease zerk for easy greasing of jack
- •6"x8" welded on durable zinc drop leg sand foot
- •Drop leg adds 13.75" of adjustability
- •TJD-8000S 15" travel distance, 25.5" jack height when fully retracted, drop leg version
- •TJDA-8000S a frame mount version also available special order



8000lb Capacity Topwind Square Tube Jack (Select Series)



- •8,000lb Support Capacity / 7,000lb Lift Capacity
- •Comfortable claw knob and clear zinc solid bar handle that can be folded away when not in use
- •Durable exterior grade finish on outer tube and clear zinc finish on inner tube and drop leg foot
- •2-1/4" square outer tube construction
- •Grease zerk for easy greasing of jack
- •6"x8" welded on durable zinc drop leg sand foot
- •Drop leg adds 13.75" of adjustability
- •A Frame style flange allows to bolt on to a trailer frame (8" from bottom of jack foot to bottom of flange when fully retracted)
- •TJDA-8000 15" travel distance, 25.5" jack height when fully retracted, a frame bolt on flange available special order



8000lb Capacity Sidewind Square Tube Jack (Select Series)



- •8,000lb Support Capacity / 7,000lb Lift Capacity
- •Large grooved comfort handle to operate the jack
- •Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and drop leg foot
- •2-1/4" square outer tube construction
- •Grease zerk for easy greasing of jack
- •6"x8" welded on durable zinc drop leg sand foot
- •Drop leg adds 13.75" of adjustability
- •A Frame style flange allows to bolt on to a trailer frame (8" from bottom of jack foot to bottom of flange when fully retracted)
- •TJDA-8000S 15" travel distance, 25.5" jack height when fully retracted, a frame bolt on flange available special order



12000lb Capacity Sidewind Square Tube Jack (Standard Series)



www.ramtrailerproducts.com

Ideal for use with commercial, construction, larger utility and many other types of trailers where heavy duty lifting is needed.

- •12,000lb Support Capacity / 10,000lb Lift Capacity
- •Direct weld single speed side wind jack
- •Durable exterior grade black finish
- •4" square outer tube construction
- •Grease zerks for easy greasing of jack
- •8"x8" welded on durable drop leg sand foot
- •Large octagon bushings on gear shaft for better function
- •Drop leg adds 13.75" of adjustability
- •TJD-12000SP-F2 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to front, handle/handle clip and handle mounting hardware spring return drop leg jack
- •TJD-12000SP-F2NH 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to front, without handle assembly spring return drop leg jack
- •TJD-12000SP-R2 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to right, handle/handle clip and handle mounting hardware spring return drop leg jack •TJD-12000SP-R2NH 12.5" travel distance, 28" jack
- height when fully retracted, 25.5" total adjustment, pin to right, without handle assembly spring return drop leg jack
- •TJD-12000-F2 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to front, handle/handle clip and handle mounting hardware non-spring return drop leg jack
- •TJD-12000-F2NH 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to front, without handle assembly non-spring return drop leg jack
- •TJD-12000-R2 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment), pin to right, handle/handle clip and handle mounting hardware non-spring return drop leg jack
- •TJD-12000-R2NH 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to right, without handle assembly non-spring return drop leg jack



12000lb Capacity Sidewind Square Tube Two Speed Jack



Ideal for use with commercial, construction, larger utility and many other types of trailers where heavy duty lifting is needed.

- •12,000lb Support Capacity / 10,000lb Lift Capacity
- Direct weld two speed side wind jack
- •Two speed gear box is within the width of the outer tube to eliminate interference issues at the front of the trailer
- Durable exterior grade black finish
- •4" square outer tube construction
- •Grease zerks for easy greasing of jack
- •8"x8" welded on durable drop leg sand foot
- •Large octagon bushing on gear shaft for better function
- •Drop leg adds 13.75" of adjustability
- •TJD2SP-12900SP-F 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to front, handle/handle clip and handle mounting hardware spring return drop leg jack



12000lb Capacity Sidewind Square Tube Jack (12500 Series)



Ideal for use with commercial, construction, larger utility and many other types of trailers where heavy duty lifting is needed.

- •12,000lb Support Capacity / 10,000lb Lift Capacity
- •Direct weld single speed side wind jack
- •Durable exterior grade black finish
- •4" square outer tube construction
- •Grease zerks for easy greasing of jack
- •9"x9" welded on durable drop leg sand foot with weep holes for water drainage
- •Large octagon bushings on gear shaft for better function
- •Drop leg adds 13.75" of adjustability
- •TJD-12500SP-F2 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to front, handle/handle clip and handle mounting hardware spring return drop leg jack (available special order upon request)
- •TJD-12500SP-F2NH 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to front, without handle assembly spring return drop leg jack (available special order upon request)
- •TJD-12500SP-R2 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to right, handle/handle clip and handle mounting hardware spring return drop leg jack (available special order upon request)
- •TJD-12500SP-R2NH 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to right, without handle assembly spring return drop leg jack (available special order upon request)



12000lb Capacity **Sidewind Square Tube Jack (Select Series)**



- •12,000lb Support Capacity / 10,000lb Lift Capacity
- •Direct weld single speed side wind jack
- •Durable exterior grade black finish
- •4" square outer tube construction
- •Welded belly band on bottom of outer tube for added strength
- •Grease zerks for easy greasing of jack
- •8"x8" welded on durable drop leg sand foot
- ·Large octagon bushings on gear shaft for better function
- •Drop leg adds 13.75" of adjustability
- •TJD-12020SP-F2 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to front, handle/handle clip and handle mounting hardware spring return drop leg jack
- •TJD-12020SP-F2NH 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to front, without handle assembly spring return drop leg jack •TJD-12020SP-R2 12.5" travel distance, 28"
- jack height when fully retracted, 25.5" total adjustment, pin to right, handle/handle clip and handle mounting hardware spring
- return drop leg jack
- •TJD-12020SP-R2NH 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to right, without handle assembly spring return drop leg jack



12000lb Capacity Topwind Square Tube Jack



- •12,000lb Support Capacity / 10,000lb Lift Capacity
- •Direct weld single speed top wind jack
- •Durable exterior grade black finish
- •4" square outer tube construction
- •Grease zerk for easy greasing of jack
- •8"x8" welded on durable drop leg sand foot
- •Drop leg adds 13.75" of adjustability
- •TJD-12000TWSP-R 12.5" travel distance, 26" jack height when fully retracted, 25.5" total adjustment, pin to right, handle/handle clip and handle mounting hardware spring return drop leg jack



12000lb Capacity Topwind Square Tube Jack (Claw Handle)



- •12,000lb Support Capacity / 10,000lb Lift Capacity
- •Direct weld single speed top wind jack
- •Durable exterior grade black finish
- •Comfortable claw knob and clear zinc solid bar handle that can be folded away when not in use
- •4" square outer tube construction
- •Grease zerk for easy greasing of jack
- •8"x8" welded on durable drop leg sand foot
- •Drop leg adds 13.75" of adjustability
- •TJD-12003TWSP-R 12.5" travel distance, 26" jack height when fully retracted, 25.5" total adjustment, pin to right, handle/handle clip and handle mounting hardware spring return drop leg jack (available special order upon request)



15000lb Capacity Sidewind Square Tube Jack



Ideal for use with commercial, construction, larger utility and many other types of trailers where heavy duty lifting is needed.

- •15,000lb Support Capacity / 12,000lb Lift Capacity
- •Direct weld single speed side wind jack
- •Durable exterior grade black finish
- •4 3/8" square outer tube construction
- •Grease zerks for easy greasing of jack
- •9"x9" welded on durable drop leg sand foot with weep holes for water drainage
- •Large octagon bushings on gear shaft for better function
- •Drop leg adds 13.75" of adjustability •TJD-15000SP-F 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to front,

handle/handle clip and handle mounting hardware spring return drop leg jack (available special order

upon request)

- •TJD-15000SP-R 12.5" travel distance, 28" jack height when fully retracted, 25.5" total adjustment, pin to right, handle/handle clip and handle mounting hardware spring return drop leg jack (available special order upon request)
- •TJD2SP-15000SP-F two speed version



20000lb Capacity Sidewind Dual Pin Square Tube Jack



- •Large dual pin foot release for easy activation of the spring return drop leg
- •20,000lb Support Capacity / 12,500lb Lift Capacity
- •Direct weld single speed side wind iack
- •Durable exterior grade black finish
- •4 3/8" square outer tube construction
- •Grease zerks for easy greasing of jack
- •9"x9" welded on durable drop leg sand foot with weep holes for water drainage
- •Large octagon bushings on gear shaft for better function
- •Drop leg adds 13" of adjustability
- •TJDDP-20000SP-F 13.5" travel distance, 29.5" jack height when fully retracted, 25.5" total adjustment, pin to front, handle/handle clip and handle mounting hardware spring return drop leg jack
- •TJDDP2SP-20000SP-F two speed version



25000lb Capacity Sidewind Dual Square Tube Jack



2 speed jack

- •25,000lb Support Capacity / 25,00lb Lift Capacity
- •Direct weld single speed side wind jack
- Durable exterior grade black finish
- •4 3/8" square outer tube construction
- •Grease zerks for easy greasing of jack
- •Drop leg adds 13.75" of adjustability
- •TJD-25100-F 12.5" travel distance, 26.5" jack height when fully retracted, 25.5" total adjustment, pin to front, handle/handle clip and handle mounting hardware spring return drop leg jack
- •TJD2SP-25100-F two speed version



Stabilizer Jacks





- •1,000 lb support capacity/650 lb lift capacity
- •Adjustable from 11-1/2" to 17-3/4"" vertical height
- •Handle included with every two stabilizer jacks
- •Black painted finish
- •SJ-100 Flip Down Stabilizer Jack
- •SJ-100-HD Handle (if extra handles are needed)



Telescopic stabilizer jack is ideal for cargo and industrial type trailers for corner stabilizing.

- •2,000 lb support capacity
- •20" durable zinc inner square tube allows multiple height adjustments
- •8" weldable raw 1-1/2" outer tube
- •5-1/4" diameter foot with weep holes for water drainage
- •Includes a snap pin for easy and quick adjusting of jack
- •SJ-R208 Telescopic Jack (bulk)
- •SJ-R208-CTN Telescopic Jack (carton quantities)



Telescopic stabilizer jack is ideal for cargo and industrial type trailers for corner stabilizing.

- •5,000 lb support capacity
- •20" and 29" durable zinc inner square tube models available that allow for multiple height adjustments
- •13" weldable raw 2" outer tube
- •4" x 7 1/2" sand foot
- •Includes a snap pin for easy and quick adjusting of jack
- •SJ2-2013 Telescopic Jack (bulk) with 20" inner tube available special order upon request
- •SJ2-2913 Telescopic Jack (bulk) with 29" inner tube available special order upon request



Scissor stabilizer jack is ideal for travel and 5th wheel trailers.

- •5,000 lb support capacity (in tandem)
- •Adjustable from 4" to 24" vertical height
- •Bearing set on crank side for longer jack life
- •Eight slotted holes on top jack plate for mounting adjustability
- Black painted finish
- •TJSC-24 Scissor Jack (handle sold separately)
- •TJSC-24-HD Handle Assembly



"The Best Overall Value In The Industry"







www.ramtrailerproducts.com

Electric Jacks

For use with travel trailers, cargo and other types with a frame couplers.

- •Easy to operate with just a flip of the switch
- •Durable exterior grade black outer tube and zinc inner tube
- •Zinc finish inner tube with removable sand foot
- •18" travel length
- •Includes drop leg for 7-1/2" of additional adjustment
- •Bright LED light for easy night time hookup
- •Durable hardened steel gears for years and of normal use
- •Crank handle for manual override in case of power loss
- •Setup for use with a 12 volt RV/Marine deep cycle battery (battery not provided)
- •57" single wire to hook up to trailer battery (self grounding unit)
- •EJ-3520-BBX 3500 lb lift capacity black housing retail boxed
- •EJ-3520-WBX 3500 lb lift capacity white housing retail boxed

For use with travel trailers, cargo and other types with a frame couplers.

- •Easy to operate with just a flip of the switch
- •Durable exterior grade black outer tube and zinc inner tube
- •Zinc finish inner tube with removable sand foot
- •18" travel length
- •Includes drop leg for 7-1/2" of additional adjustment
- •Bright LED light for easy night time hookup
- •Durable hardened steel gears for years and of normal use
- •Crank handle for manual override in case of power loss
- •Setup for use with a 12 volt RV/Marine deep cycle battery (battery not provided)
- •Two 57" wires to hook up to trailer battery and grounding wire
- •EJ-3550-BBX 3500 lb lift capacity black housing retail boxed
- •EJ-3550-WBX 3500 lb lift capacity white housing retail boxed

For use with travel trailers, cargo and other types with a frame couplers.

- •Easy to operate with just a flip of the switch
- •Durable exterior grade black outer tube and zinc inner tube
- •Zinc finish inner tube with removable sand foot
- •18" travel length
- •Includes drop leg for 7-1/2" of additional adjustment
- •Bright LED light for easy night time hookup
- •Durable hardened steel gears for years and of normal use
- •Crank handle for manual override in case of power loss
- •Setup for use with a 12 volt RV/Marine deep cycle battery (battery not provided)
- •Two 57" wires to hook up to trailer battery and grounding wire
- Includes remote control
- •EJ-3575-BBX 3500 lb lift capacity black housing retail boxed (available special order upon request)
- •EJ-3577-BBX 3500 lb lift capacity white housing retail boxed with 7 way plug (available special order upon request)



Marine Jack Replacement Parts

SNP-RING – 2" Snap Ring for MJ-1001 RAM marine jack model (also works with TJB RAM Series Jacks)



PLGPIN-12 – 1/2" Plunger Pin kit for RAM MJ marine swivel jacks (also works with TJB RAM Series Jacks)



GRS-ZERK – Grease Zerk for MJSQ-2500B RAM square tube marine jack (also works with all RAM jacks that include a grease zerk)



MJSQ-2500B-CP — Cap for MJSQ-2500B RAM square tube marine jack (and old version of TJD-5000S RAM 5K drop leg jack)



MJ-1000B-KB— Knob handle with bolt on nut. For retail boxed marine jacks only.



TJD-5000-FT – Drop leg for MJSQ-2500B RAM square tube marine jack (and TJD RAM 5K drop leg jacks)



MJ-1000B-MK— Bolt through jack mounting bracket, swivel plate/hardware for MJ-1200B, MJ-1500B and MJ-1500B-DWL



JFC-PN – Snapper pin for drop leg on MJSQ-2500B RAM square tube marine jack (and TJD RAM 5K drop leg jacks)



MJ-1001B-MK– Bolt through jack mounting bracket for MJ-1001B



MJ-1500B-HD— Handle replacement with pin for RAM MJ-1500B and MJ1500B-DWL RAM marine jacks



MJ-1000B-MBB— Bolt through jack mounting bars (2) and bolts/nuts (4) for all RAM bolt on marine jacks for 1000lb and 1200lb capacity marine jacks



MJ-1500B-MBB— Bolt through jack mounting bars (2) and bolts/nuts (4) for all RAM bolt on marine jacks for 1500lb and 2500lb capacity marine jacks



MJ-1000B-HD— Handle replacement with pin for RAM 1000# and 1200# RAM marine jacks



JWK-6P- 6" poly wheel kit (wheel, bolt and nut)



MJ-1000B-GR– Gear kit for RAM marine jacks

MJ-1000B-BR— Bearing for RAM

marine jacks



JWK-8P-8" poly wheel kit (wheel, bolt and nut)



MJ-1000B-CP— Cap for RAM MJ-1000B and MJ-1200B RAM marine jacks



JWK-6DP— 6" dual poly wheel kit (2 wheels, bolt and nut)



MJ-1500B-CP— Cap for RAM MJ-1500B and MJ-1500B-DWL RAM marine jacks (Also works on TJA 2K sidewind a frame jacks)




JWK-6P-BUNT- bolt and nut for wheel kit



A Frame Jack Replacement Parts

TJA-2000-HD – Top wind handle with bolt and nut for RAM 2K a frame jacks. Also for RAM 5K (TJA-5000) model.





HDKB-BLK— Handle knob and cap nut for RAM a frame side wind jacks

jacks




HDKB-BLKF— Black flower shaped knob and cap nut for 2K and 5K RAM top wind jacks (red photo shown)



HDKB-RED— Red flower shaped knob and cap nut for 2K and 5K RAM top wind jacks (red photo shown)



JFC-PN– Snapper pin for a frame jack foot and caster wheel accessories and couplers.





TJA-2000S-GR— Gear kit for RAM 2K side wind jacks



TJA-2000S-CP— Cap for 2K side wind RAM a frame jacks (Also for 1500lb RAM marine jacks.)



TJPB-HD— Black flower shaped solid handle with bolt and nut for TJA-5000T model RAM top wind a frame jack. (Also for 2K TJB weld on bracket jacks as well as 2K and 5K TJP pipe mount jacks.)



TJD-7000S-CP— Cap with bolts for RAM 5K side wind a frame jack.



TJD-7000S-GR– Gear kit for RAM 5K side wind a frame jack.



TJD-7000S-HD— Handle replacement with pin for RAM 5K side wind a frame jack.





Weld On Bracket and Pipe Mount Round Tube Jack Replacement Parts

TJD-7000S-HD— Handle replacement with pin for RAM 2K – 7K side wind weld on bracket and pipe mount jacks



TJA-2000S-GR– Gear kit for RAM 2K and 5K side wind jacks



TJA-2000-BR— Bearing for 2K top wind and 5K sidewind RAM a frame jacks.



HDKB-BLK– Handle knob and cap nut for RAM a frame side wind jacks



HDKB-BLKF— Black flower shaped knob and cap nut for 2K and 5K RAM top wind jacks (red photo shown)



HDKB-RED— Red flower shaped knob and cap nut for 2K and 5K RAM top wind jacks (red photo shown)



TJB-MB– Mounting bracket for 2K TJB weld on bracket jacks



GRS-ZERK – Grease zerk for all RAM jacks that include a grease zerk




SNP-RING – 2" Snap Ring for TJB RAM Series Jacks





PLGPIN-12 – 1/2" Plunger Pin for TJB RAM Series Jacks



TJPB-HD— Black flower shaped solid handle with bolt and nut for 2K TJB weld on bracket jacks as well as 2K and 5K TJP pipe mount jacks.









TJP-OP58– Jack mount, 2.5" O.D., weld on, fitting 2.25" jack, 5/8" pin hole size size (For 5K sidewind round tube, 8K support/7K lift capacity topwind/sidewind round tube and 5K square tube pipemount jacks)



TJP-OP2558– Jack mount, 2.75" O.D., weld on, fitting 2.5" outer tube square tube jack, 5/8" pin hole size size (For 8K support/7K lift capacity topwind/sidewind square tube pipemount jacks with 2.5" outer tube)

TJP-IP916-CTN— Male pipe (inside pipe), 2" O.D., 9/16" pin hole size (For 2K topwind/sidewind round tube and 5K topwind round tube pipemount jacks.)







TJP-PN916– 9/16" pin with chain, 3.5" long **TJP-PN58**– 5/8" pin with chain, 4.0"

long





5K and 7K Square Tube Jack Replacement Parts

HDKB-BLKF— Black flower shaped knob and cap nut 5K and 7K RAM top wind jacks (red photo shown)

HDKB-RED— Red flower shaped knob and cap nut for 5K and 7K RAM top wind jacks (red photo shown)



GRS-ZERK – Grease zerk for all RAM jacks that include a grease zerk



TJD-7000-BR— Bearing for 5K and 7K square tube jacks.



TJD-7000S-GR— Gear kit for RAM 5K and 7K side wind square tube jacks



TJD-5000-FT – Drop leg for 5K square tube jacks.



JFC-PN — Snapper pin for drop leg on 5K square tube drop leg jacks.



TJD-7000-HD— Black flower shaped solid handle with bolt and nut for 5K and 7K top wind square tube jacks.




TJD-7000S-CP— Cap with bolts for RAM 5K and 7K side wind square tube jacks.



TJD-7000S-HD— Handle replacement with pin and bushing for RAM 5K and 7K side wind square tube jacks



TJD-7000S-BU— Handle bushing for RAM 5K and 7K side wind square tube jacks (I.D. .5")





TJD-7000S-BUT— Handle bushing for 7K top wind square tube jacks (I.D. .67")

TJD-7000-FT – Drop leg for 7K square tube jacks.



TJD-7000-PN – Pin for drop leg on 7K square tube drop leg jacks.

Additional items for 5K and 7K Square Tube Pipe Mount Jacks

TJP-OP58– Jack mount, 2.5" O.D., weld on, fitting 2.25" jack, 5/8" pin hole size size (For 5K sidewind round tube, 8K support/7K lift capacity topwind/sidewind round tube and 5K square tube pipemount jacks)



TJP-OP2558– Jack mount, 2.75" O.D., weld on, fitting 2.5" outer tube square tube jack, 5/8" pin hole size size (For 8K support/7K lift capacity topwind/sidewind square tube pipemount jacks with 2.5" outer tube)

TJP-IP58-CTN— Male pipe (inside pipe), 2" O.D., 5/8" pin hole size (For 5K sidewind round tube, 8K support/7K lift capacity topwind/sidewind round tube and 5K square tube pipemount jacks)



TJP-FP58— Female mating pipe, 3" O.D., 5/8" pin hole size (For 8K support/7K lift capacity round tube and square tube pipe mount jacks)



TJP-PN58– 5/8" pin with chain, 4.0" long





12K Square Tube Jack Replacement Parts

GRS-ZERK – Grease zerk for all RAM jacks that include a grease zerk



TJD-12000-SHABUS – Handle shaft w/brass bushings for 12K jacks



TJD-12000-BU - Bushing for 12K jacks

TJD-12000-GR – Gear kit with shear (drive) pins for 12K jacks



TJD-12000-CLIP – Handle clip for 12K jacks



TJD-12000-CP - Cap for 12K jacks



TJD-12000-BR - Bearing for 12K jacks



TJD-12000-PPN – Drop leg plunger pin assembly (3/4" pull pin, spring, washer and cotter pin) for 12K jacks



TJD-12000-RSP – Return spring for 12K jacks



TJD-12000SP-FIP – Inner tube with drop leg and foot for 12K jacks





TJD-12000-RODNUT – Treaded rod, nut and cup assembly for 12K jacks



TJD2SP-12900-GBX – Gear box for TJD2SP-12900SP-F two speed 12K jacks





TJD-25100-CP Cap with Screws for 25K jacks

TJD2SP-25100-GBX
Gear box for TJD2SP-25000

LG-XTB connecting tubes for 50k 2 speed jacks

STLG-H12 handle for semi trailer landing gear, 12"

STLG-H21 handle for semi trailer landing gear, 21"

TJDDP-FPN

Foot loop bar for dual pin foot release and both pins, 20K dual pin jack



Electric Jack Replacement Parts

EJ-3520-BCV - Black motor housing and lens for EJ-3520 model






EJ-3520-WCV – White motor housing and lens for EJ-3520 model



EJ-3520-BCP – Black cap for EJ-3520 model (photo shown) Also fits on older style EJ-3550 models like photo on bottom of page.



EJ-3520-WCP - White cap for EJ-3520 model





EJ-3520-HARN – Wire harness for EJ-3520 model

EJ-3520-PSW - Power switch for EJ-3520 model



EJ-3520-LSW - Light switch for EJ-3520



EJ-3520-HD – Handle for EJ-3520, EJ-3550 and EJ-3575 models



EJ-3520-FT - Drop leg for EJ-3520, EJ-3550 and EJ-3575 models



EJ-3520-LENS - Light lens only for EJ-3520 model



EJ-3550-PSW – Power switch for EJ-3550 model

EJ-3550-LSW – Light switch for EJ-3550 model

EJ-3550-BCV - Black cover for EJ-3550 model



Rubber cap styles for EJ-3550 jack

EJ-3550-BBX - EJ-3550 RAM Electric Jack