



A Frame Jack and Accessories Catalog



2000lb Jack



5000lb Jack



2000lb Jack



5000lb Jack



2000lb Capacity Topwind A-Frame Jack

For use with trailers with A-frame couplers.

3,000lb Support Capacity / 2,000lb Lift Capacity

Large grooved comfort handle to operate the jack

Durable exterior grade black finish on outer and inner tubes (clear zinc model also available) (2 1/4" outer tube construction)

Handle arm durable zinc finish

TJA-2000-B 14" travel distance, 8.25" bracket height from bottom of jack to bolt flange, 21.25" jack height when fully retracted

TJA-2000-Z 14" travel distance, 8.25" bracket height from bottom of jack to bolt flange, 21.25" jack height when fully retracted - clear zinc outer and inner tubes

TJA-2001-B 14" travel distance, 5" bracket height from bottom of jack to bolt flange, 21.25" jack height when fully retracted

TJA-2002-B 15" travel distance, 9.25" bracket height from bottom of jack to bolt flange, 24.25" jack height when fully retracted





2000lb Capacity Topwind A-Frame Jack

**For use with trailers with A-frame
couplers.**

**3,000lb Support Capacity / 2,000lb Lift Ca-
pacity**

Round knob handle design

**Durable exterior grade black finish on
outer and inner tubes (clear zinc model
also available) (2 1/4" outer tube construc-
tion)**

Handle arm durable zinc finish

**TJA-2006-B 14" travel distance, 8.25"
bracket height from bottom of jack to bolt
flange, 21.25" jack height when fully re-
tracted**





2000lb Capacity Sidewind A-Frame Jack

For use with trailers with A-frame couplers.

3,000lb Support Capacity / 2,000lb Lift Capacity

Large grooved comfort handle to operate the jack

Durable exterior grade black finish on outer and inner tubes (2 1/4" outer tube construction)

Handle arm durable zinc finish

TJA-2000S / TJA-2001S-B 14.5" travel distance, 9.25" bracket height from bottom of jack to bolt flange, 25" jack height when fully retracted





2000lb Capacity Sidewind A-Frame Jack (Exterior Gear Box Style)



For use with trailers with A-frame couplers.

3,000lb Support Capacity / 2,000lb Lift Capacity

Large grooved comfort handle to operate the jack

Grease zerk for easy greasing of jack

Durable exterior grade black finish on outer and inner tubes (2 1/4" out tube construction)

Handle arm durable zinc finish

TJA-2100S-B 15" travel distance, 9.25" bracket height from bottom of jack to bolt flange, 23" jack height when fully retracted (available special order upon request)



5000lb Capacity Topwind A-Frame Jack

For use with trailers with A-frame couplers.

5,000lb Support Capacity / 3,000lb Lift Capacity

Large grooved comfort handle to operate the jack

Durable exterior grade black finish on outer and inner tubes (clear zinc model also available) (2 1/4" outer tube construction)

Handle arm durable zinc finish

TJA-5000-B 14" travel distance, 10.25" bracket height from bottom of jack to bolt flange, 21.25" jack height when fully retracted





5000lb Capacity Topwind A-Frame Jack (Taller Version)

For use with trailers with A-frame couplers.

5,000lb Support Capacity / 3,000lb Lift Capacity

Comfortable claw knob and clear zinc solid bar handle that can be folded away when not in use

Durable exterior grade black finish on outer and inner tubes (clear zinc model also available) (2 1/4" outer tube construction)

TJA-5000T-B 15" travel distance, 10" bracket height from bottom of jack to bolt flange, 22.75" jack height when fully retracted

TJA-5000T-Z 15" travel distance, 10" bracket height from bottom of jack to bolt flange, 22.75" jack height when fully retracted - clear zinc outer and inner tubes





5000lb Capacity Sidewind A-Frame Jack (Exterior Gear Box Style)



For use with trailers with A-frame couplers.

5,000lb Support Capacity / 3,000lb Lift Capacity

Large grooved comfort handle to operate the jack

Grease zerk for easy greasing of jack

Durable exterior grade black finish on outer and inner tubes (2 1/4" out tube construction)

Handle arm durable zinc finish

TJA-5000S-B 14.5" travel distance, 9" bracket height from bottom of jack to bolt flange, 25" jack height when fully retracted



A Frame Jack Accessories



For use with any RAM A-Frame Jack

- Durable zinc finish
- Includes bolt and nyloc nut to secure to the bottom of an a-frame jack
- Two weep holes in the bottom of the sand foot for water drainage
- 2,000 lb capacity
- 2-1/4" x 4-1/2" foot size
- JF-99



For use with any RAM A-Frame Jack

- Includes mounting clip assembly to secure to the bottom of an a-frame jack
- 1.7" tall
- 4-1/2" x 6-1/4" foot size
- 2,000 lb capacity
- JF-100-Z / JF-100-Z-1020 durable zinc finish
- JF-100-B-1020 durable black powder coat finish



For use with any RAM A-Frame Jack

- Includes mounting clip assembly to secure to the bottom of an a-frame jack
- 8.5" tall
- 4-1/2" x 6-1/4" foot size
- 2,000 lb capacity
- JF-101 durable zinc finish



A Frame Jack Accessories




For use with 2K top wind RAM A-Frame Jacks

- Includes mounting clip assembly to secure to the bottom of an a-frame jack
- 9.5" tall, five position adjustability
- 5-1/4" diameter foot with weep holes for water drainage
- 2,000 lb capacity
- JF-1005H-Z durable zinc finish



For use with any RAM A-Frame Jack
Durable zinc finish

- Includes mounting clip assembly to secure to the bottom of an a-frame jack
- 6" wheel assembly
- 1,200 lb capacity
- JC-101 poly wheel construction (shown in photo)
- JC-102 steel wheel construction

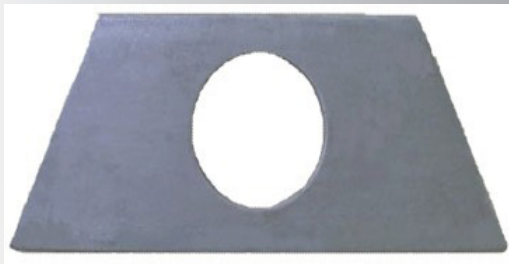

Bottom Support Plate

- Raw finish to be welded on the underside of an a frame coupler
- 2.29" hole for a frame jack outer tube to pass through when installing
- Additional side load support for an a frame jack application
- JSP-100