

Hydraulic Jack Products Catalog









15K Hydraulic Square Tube Weld On Jack



- Hydraulic application allows for fast manual free operation
- •15,000lb support/12,000lb lift capacity jack
- Pivoting large 10"x10" foot pad that works well on uneven surfaces
- Durable exterior grade black finish
- •59" extended height, 34.8" retracted height
- 24.2" travel distance
- •Works well with hydraulic pump/power units up to 3200 psi extension, 1500 psi retraction pressure
- Hydraulic pump/power unit and control switch/remote pendant available (sold separately)
- ·HJ-15000-LEG direct weld jack



15K Hydraulic Square Tube Bolt On Jack



- Hydraulic application allows for fast manual free operation
- •15,000lb support/12,000lb lift capacity jack
- Pivoting large 10"x10" foot pad that works
 well on uneven surfaces
- Durable exterior grade black finish
- •59" extended height, 34.8" retracted height
- •24.2" travel distance
- •Works well with hydraulic pump/power units up to 3200 psi extension, 1500 psi retraction pressure
- Hydraulic pump/power unit and control switch/remote pendant available (sold separately)
- •HJ-15000-LEG1 curb side jack has two 7.5"x4" mounting tabs for easy bolt-on application (photo shown)
- •HJ-15000-LEG2 street side jack has two 7.5"x4" mounting tabs for easy bolt-on application



15K Self Contained Hydraulic Square Tube Bolt On Jack



Ideal for use with horse/livestock as well as commercial and construction trailers.

- Hydraulic application allows for fast manual free operation
- •15,000lb support/12,000lb lift capacity jack
- •Pivoting large 10"x10" foot pad that works well on uneven surfaces
- Durable exterior grade black finish
- •59" extended height, 34.8" retracted height
- •24.2" travel distance
- •Self contained hydraulic pump/power unit to operate jack, 1.6KW 12V DC motor, dual/ double acting, 2.5 quarts usage volume reservoir, 3200 psi extension, 1500 psi retraction working pressure
- •Includes control switch/remote pendant with lock feature
- ·HJ-15009 jack has two 7.5"x4" mounting tabs for easy bolt-on application (replaces HJ-15008)



15K Hydraulic Square Tube Weld On Jack w/Ingetrated Counter Balance Valve



- Patent pending integrated counter
 balance valve that eliminates drift/retraction when trailer is stationary and not in use
- Hydraulic application allows for fast manual free operation
- •15,000lb support/12,000lb lift capacity jack
- Pivoting large 10"x10" foot pad that works
 well on uneven surfaces
- Durable exterior grade black finish
- •59" extended height, 34.8" retracted height
- 24.2"travel distance
- •Works well with hydraulic pump/power units up to 3200 psi extension, 1500 psi retraction pressure
- Hydraulic pump/power unit and control switch/remote pendant available (sold separately)
- •HJ-15070-LEG direct weld jack



15K Hydraulic Square Tube Bolt On Jack w/Ingetrated Counter Balance Valve



- Patent pending integrated counter
 balance valve that eliminates drift/retraction
 when trailer is stationary and not in use
- Hydraulic application allows for fast manual free operation
- •15,000lb support/12,000lb lift capacity jack
- Pivoting large 10"x10" foot pad that works well on uneven surfaces
- ·Durable exterior grade black finish
- •59" extended height, 34.8" retracted height
- •24.2" travel distance
- •Works well with hydraulic pump/power units up to 3200 psi extension, 1500 psi retraction pressure
- Hydraulic pump/power unit and control switch/ remote pendant available (sold separately)
- •HJ-15070-LEG1 curb side jack has two 7.5"x 4" mounting tabs for easy bolt on application (photo shown)
- HJ-15070-LEG2 street side jack has two 7.5"x 4"
 mounting tabs for easy bolt on application



15K Self Contained Hydraulic Square Tube Bolt On Jack w/Integrated Counter Balance



Ideal for use with horse/livestock as well as commercial and construction trailers.

- Patent pending integrated counter
 balance valve that eliminates drift/retraction when trailer is stationary and not in use
- •Hydraulic application allows for fast manual free operation
- •15,000lb support/12,000lb lift capacity jack
- •Pivoting large 10"x10" foot pad that works well on uneven surfaces
- Durable exterior grade black finish
- •59" extended height, 34.8" retracted height
- 24.2"travel distance
- •Self contained hydraulic pump/power unit to operate jack, 1.6KW 12V DC motor, dual/ double acting, 2.5 quarts usage volume reservoir, 3200 psi extension, 1500 psi retraction working pressure
- •Includes control switch/remote pendant with lock feature
- •HJ-15079 jack has two 7.5"x4" mounting tabs for easy bolt-on application (replaces HJ-15078)




8K Hydraulic Square Tube Weld On Jack



- Hydraulic application allows for fast manual free operation
- •8,000lb support/8,000lb lift capacity jack
- Pivoting 6"x7.75" foot pad that works well on uneven surfaces
- Durable exterior grade black finish
- •52.75" extended height, 32.75" retracted height
- 20"travel distance
- •Works well with hydraulic pump/power units up to 3200 psi extension, 1500 psi retraction pressure
- Hydraulic pump/power unit and control switch/remote pendant available (sold separately)
- ·HJ-8000-LEG direct weld jack



8K Self Contained Hydraulic Square Tube Bolt On Jack

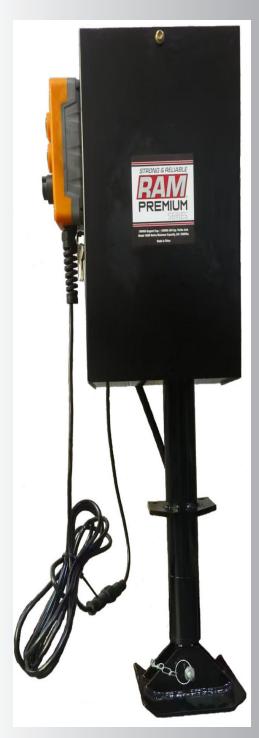

Ideal for use with horse/livestock as well as commercial and construction trailers.

- Hydraulic application allows for fast manual free operation
- •8,000lb support/8,000lb lift capacity jack
- •Pivoting 8"x 8" foot pad that works well on uneven surfaces
- Durable exterior grade black finish
- •57.5" extended height, 33.5" retracted height
- 24"travel distance
- Self contained hydraulic pump/power unit to operate jack, 1.6KW 12V DC motor, dual/double acting, 2.5 quarts usage volume reservoir, 3200 psi extension, 1500 psi retraction working pressure
- Includes control switch/remote pendant with lock feature
- •HJ-8009A jack has a 5"x 5"mounting plate with three .52"bolt holes (mounting hardware not included)



7K Hydraulic Round Tube Bolt On Jack



- Hydraulic application allows for fast manual free operation
- •7,000lb support/7,000lb lift capacity jack
- •Pivoting 7"x 7" foot pad that works well on uneven surfaces
- Durable exterior grade black finish
- •47.5" extended height, 27.5" retracted height
- •20" travel distance
- Works well with hydraulic pump/power units up to 3200 psi extension, 1500 psi retraction pressure
- Hydraulic pump/power unit and control switch/remote pendant available (sold separately)
- •HJ-7000A jack has a 5"x 5" mounting plate with three .52" bolt holes (mounting hardware not included)