




Weld On Bracket and Weld On Pipemount Jack Catalog



2000lb Jack

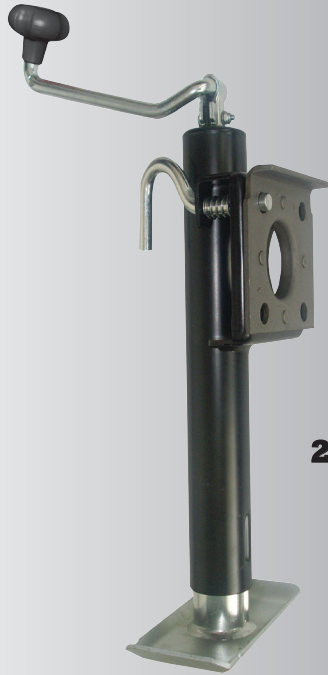

2000lb Jack



5000lb Jack



5000lb Jack



2000lb Capacity Topwind Weld On Jack

Ideal for use with ag, industrial, commercial, recreational and many other types of trailers.

3,000lb Support Capacity / 2,000lb Lift Capacity

Comfortable claw knob and clear zinc solid bar handle that can be folded away when not in use

Large 1/2" pull pin to activate the swivel mechanism

Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and foot (2 1/4" outer tube construction)

Grease zerk for easy greasing of jack

Deep seated snap ring for side load support and raw weld on bracket

3-3/4"x7-1/2" welded on durable zinc sand foot

TJB-2001-B 10" travel distance, 11" bracket height from bottom of jack to center of swivel mount, 16.75" jack height when fully retracted

TJB-2001-Z 10" travel distance, 11" bracket height from bottom of jack to center of swivel mount, 16.75" jack height when fully retracted - zinc outer and inner tube

TJB-2002-B 15" travel distance, 16" bracket height from bottom of jack to center of swivel mount, 22" jack height when fully retracted





2000lb Capacity Sidewind Weld On Jack

Ideal for use with ag, industrial, commercial, recreational and many other types of trailers.



- **3,000lb Support Capacity / 2,000lb Lift Capacity**

- **Large grooved comfort handle to operate the jack**

- **Large 1/2" pull pin to activate the swivel mechanism**

- **Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and foot (2 1/4" outer tube construction)**

- **Grease zerk for easy greasing of jack**

- **Deep seated snap ring for side load support and raw weld on bracket**

- **3-3/4"x7-1/2" welded on durable zinc sand foot**

- **TJB-2001S-B 10" travel distance, 10" bracket height from bottom of jack to center of swivel mount, 17.75" jack height when fully retracted**

- **TJB-2002S-B 15" travel distance, 15.25" bracket height from bottom of jack to center of swivel mount, 22.75" jack height when fully retracted**



2000lb Capacity Topwind Pipemount Jack



Ideal for use with ag, industrial, commercial, recreational and many other types of trailers.

**•3,000lb Support Capacity /
2,000lb Lift Capacity**

**•Comfortable claw knob and
clear zinc solid bar handle that
can be folded away when not in
use**

**•9/16" pin and lanyard assembly
affixed to the jack**

**•Durable exterior grade black
finish on outer tube and clear
zinc finish on inner tube and foot
(2 1/4" outer tube construction)**

**•Grease zerk for easy greasing of
jack**

**•Includes a 2" raw round weld on
mating pipe**

**•3-3/4"x7-1/2" welded on durable
zinc sand foot**

**•TJP-2001-B 10" travel distance,
11" bracket height from bottom
of jack to center of swivel mount,
17" jack height when fully
retracted**

**•TJP-2002-B 15" travel distance,
16" bracket height from bottom
of jack to center of swivel mount,
22" jack height when fully
retracted**



2000lb Capacity Sidewind Pipemount Jack



Ideal for use with ag, industrial, commercial, recreational and many other types of trailers.

**•3,000lb Support Capacity /
2,000lb Lift Capacity**

**•Large grooved comfort handle to
operate the jack**

**•9/16" pin and lanyard assembly
affixed to the jack**

**•Durable exterior grade black
finish on outer tube and clear zinc
finish on inner tube and foot (2
1/4" outer tube construction)**

**•Grease zerk for easy greasing of
jack**

**•Includes a 2" raw round weld on
mating pipe**

**•3-3/4"x7-1/2" welded on durable
zinc sand foot**

**•TJP-2001S-B 10" travel distance,
10" bracket height from bottom of
jack to center of swivel mount,
17.5" jack height when fully
retracted**

**•TJP-2002S-B 15" travel distance
15.25" bracket height from bottom
of jack to center of swivel mount,
22.75" jack height when fully
retracted**



5000lb Capacity Topwind Pipemount Jack



Ideal for use with ag, industrial, commercial, recreational and many other types of trailers.

**•5,000lb Support Capacity /
3,000lb Lift Capacity**

**•Comfortable claw knob and
clear zinc solid bar handle that
can be folded away when not in
use**

**•9/16" pin and lanyard assembly
affixed to the jack**

**•Durable exterior grade black
finish on outer tube and clear
zinc finish on inner tube and foot
(2 1/4" outer tube construction)**

**•Grease zerk for easy greasing of
jack**

**•Includes a 2" raw round weld on
mating pipe**

**•3-3/4"x7-1/2" welded on durable
zinc sand foot**

**•TJP-5001-B 10" travel distance,
11" bracket height from bottom
of jack to center of swivel mount,
17" jack height when fully
retracted**

**•TJP-5002-B 15" travel distance,
16" bracket height from bottom
of jack to center of swivel mount,
22" jack height when fully
retracted**



5000lb Capacity Sidewind Pipemount Jack



Ideal for use with ag, industrial, commercial, recreational and many other types of trailers.

**•5,000lb Support Capacity /
3,000lb Lift Capacity**

**•Large grooved comfort handle to
operate the jack**

**•5/8" pin and lanyard assembly
affixed to the jack**

**•Durable exterior grade black
finish on outer tube and clear zinc
finish on inner tube and foot (2
1/4" outer tube construction)**

**•Grease zerk for easy greasing of
jack**

**•Includes a 2" raw round weld on
mating pipe**

**•3-3/4"x7-1/2" welded on durable
zinc sand foot**

**•TJP-5001S-B 10" travel distance,
10" bracket height from bottom of
jack to center of swivel mount,
17.5" jack height when fully
retracted**

**•TJP-5002S-B 15" travel distance
15.25" bracket height from bottom
of jack to center of swivel mount,
22.75" jack height when fully
retracted**



8000lb Capacity Topwind Pipemount Jack

Ideal for use with ag, industrial, commercial, recreational and many other types of trailers.

**•8,000lb Support Capacity /
7,000lb Lift Capacity**

•Comfortable claw knob and clear zinc solid bar handle that can be folded away when not in use

•5/8" pin and lanyard assembly affixed to the jack

•Durable exterior grade black finish on outer tube and clear zinc finish on inner tube and foot (2 1/4" outer tube construction)

•Grease zerk for easy greasing of jack

•Includes a heavy duty 3" raw round weld on mating pipe

•6"x8" welded on durable zinc sand foot

•TJP-7001-B 10" travel distance, 10" bracket height from bottom of jack to center of swivel mount, 19.75" jack height when fully retracted

•TJP-7002-B 15" travel distance, 15.25" bracket height from bottom of jack to center of swivel mount, 24.25" jack height when fully retracted

Image to come



8000lb Capacity Sidewind Pipemount Jack

Ideal for use with ag, industrial, commercial, recreational and many other types of trailers.

**•8,000lb Support Capacity /
7,000lb Lift Capacity**

**•Large grooved comfort handle to
operate the jack**

**•5/8" pin and lanyard assembly
affixed to the jack**

**•Durable exterior grade black
finish on outer tube and clear zinc
finish on inner tube and foot (2
1/4" outer tube construction)**

Image to come

**•Grease zerk for easy greasing of
jack**

**•Includes a heavy duty 3" raw round weld on
mating pipe**

**•6"x8" welded on durable
zinc sand foot**

**•TJP-7001S-B 10" travel distance,
10" bracket height from bottom of
jack to center of swivel mount,
21.5" jack height when fully
retracted**

**•TJP-7002S-B 15" travel distance
15.25" bracket height from bottom
of jack to center of swivel mount,
24.25" jack height when fully
retracted**