



# Bumper Pull Coupler Catalog



**Straight Couplers**



**Adjustable  
Couplers**



**Stamped  
A-Frame  
Couplers**



**Cast Head  
A-Frame  
Couplers**



# Straight Couplers

Stamped couplers are 100% ball fitted to ensure a proper fit when coupler is attached to the hitch ball

Coupler latch designs are setup for easy, yet safe coupling and uncoupling

Include all SAE required markings and are compliant to J684 standard

**CT-2001-O 2,000 lb capacity 1-7/8" ball size x 2" channel raw finish (bulk)**

**CT-2001-Z-CTN 2,000 lb capacity 1-7/8" ball size x 2" channel durable zinc finish bolt on application (bulk/carton qtys)**

**CT-2002-Z-CTN 2,000 lb capacity 1-7/8" ball size x 2-1/2" channel durable zinc finish bolt on application (bulk/carton qtys)**

**CT-2003-Z-CTN 2,000 lb capacity 1-7/8" ball size x 3" channel durable zinc finish bolt on application (bulk/carton qtys)**

**CT-3001-O 3,500 lb capacity 2" ball size x 2" channel raw finish (bulk)**

**CT-3001-Z 3,500 lb capacity 2" ball size x 2" channel durable zinc finish bolt on application (bulk)**

**CT-3001-Z-CTN 3,500 lb capacity 2" ball size x 2" channel durable zinc finish bolt on application (bulk/carton qtys)**

**CT-3002-O 3,500 lb capacity 2" ball size x 2-1/2" channel raw finish (bulk)**

**CT-3002-Z 3,500 lb capacity 2" ball size x 2-1/2" channel durable zinc finish bolt on application (bulk)**

**CT-3002-Z-CTN 3,500 lb capacity 2" ball size x 2-1/2" channel durable zinc finish bolt on application (bulk/carton qtys)**

**CT-3003-O 3,500 lb capacity 2" ball size x 3" channel raw finish (bulk)**

**CT-3003-Z-CTN 3,500 lb capacity 2" ball size x 3" channel durable zinc finish bolt on application (bulk/carton qtys)**

**CT-5003-O 5,000 lb capacity 2" ball size x 3" channel raw finish (bulk)**

**CT-5003-Z 5,000 lb capacity 2" ball size x 3" channel durable zinc finish bolt on application (bulk)**

**CT-5003-Z-CTN 5,000 lb capacity 2" ball size x 3" channel durable zinc finish bolt on application (bulk/carton qtys)**

**CT-8003-Z 8,000 lb capacity 2" ball size x 3" channel durable zinc finish bolt on application (bulk)**





# Stamped A Frame Couplers

**Stamped couplers are 100% ball fitted to ensure a proper fit when coupler is attached to the hitch ball**

**Black finish stamped couplers come standard with a durable exterior grade black finish**

**Coupler latch designs are setup for easy, yet safe coupling and uncoupling**

**Include all SAE required markings and are compliant to J684 standard**



**5K CA-5100**

**CA-5100-O 5,000 lb capacity 2" ball size raw finish**

**CA-5100-B 5,000 lb capacity 2" ball size black finish**

**CA-5100-Z 5,000 lb capacity 2" ball size durable zinc finish**

**CA-5100SH-Z 5,000 lb capacity 2" ball size durable zinc finish (include mounting holes for bolt on application)**

**CA-5400-O 14,000 lb capacity 2-5/16" ball size raw finish**

**CA-5400-B 14,000 lb capacity 2-5/16" ball size black finish**

**CA-5400-Z 14,000 lb capacity 2-5/16" ball size durable zinc finish**

**CA-5400SH-Z 14,000 lb capacity 2-5/16" ball size durable zinc finish (include mounting holes for bolt on application)**

**CA-5210-O 8,000 lb capacity 2" ball size raw finish (exterior yoke style coupler)**

**CA-5210-B 8,000 lb capacity 2" ball size black finish (exterior yoke style coupler)**



**14K CA-5400**



**8K CA-5210**



# Cast Head A Frame Couplers

**Sleeve lock couplers feature solid shank and re-enforced sleeve collar for greater strength**



**Sleeve Lock**

**Precision cast coupler head that is distinguished from other manufacturers. Its symmetric, straight with two corners and flat top shape allows for a self adjusting coupler head. This makes it easy, yet safe for coupling and uncoupling.**

**Durable exterior grade black finish**

**Include all SAE required markings and are compliant to J684 standard**

**CA-5196-B 7,000 lb capacity 2" ball size**

**CA-5296-B 12,500 lb capacity 2-5/16" ball size**

**Precision cast coupler head for heavy duty strength**

**Durable exterior grade black finish**

**Include all SAE required markings and are compliant to J684 standard**



**15K**

**CA-5280-RB 15,000 lb capacity 2-5/16" ball size black finish to receive 2-1/4" outer tube round jack**

**CA-5280-QB 15,000 lb capacity 2-5/16" ball size black finish to receive 2-1/4" outer tube square jack (available special order upon request)**

**Precision cast coupler head for heavy duty strength**

**Easy rotational action for latching with a high strength contoured aluminum die cast knob**

**Patent pending design provides an automatic secondary latching system when handle is rotated into the closed position providing a safer towing experience**

**When rotated into the open position, the coupler will stay in the open position allowing ease of hooking up to a 2-5/16" hitch ball**

**Durable exterior grade black finish**

**Include all SAE required markings and are compliant to J684 standard**



**21K**

**CA-5621-RB 21,000 lb capacity 2-5/16" ball size black powder coat finish to receive 2-1/4" outer tube round jack (available special order upon request)**



# 21K Self Latching Adjustable Coupler

**Precision cast coupler head for heavy duty strength**



**Easy rotational action for latching with a high strength contoured aluminum die cast knob**

**Patent pending self latching design provides an automatic secondary latching system when handle is rotated into the closed position providing a safer towing experience**

**When rotated into the open position, the coupler will stay in the open position allowing ease of hooking up to a 2-5/16" hitch ball**



**Includes mounting hardware to bolt to channel bracket and is setup for an industry standard 3" wide channel**


**Durable exterior grade black finish**

**Include all SAE required markings and are compliant to J684 standard**

**CTA-321SL 21,000 lb capacity 2-5/16" ball size (channel bracket sold separately)**



# 21K and 25K Lever Latch Adjustable Coupler

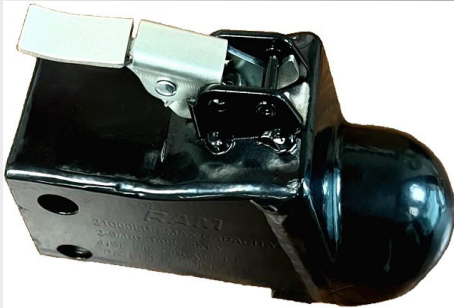

**21K**

**Coupler head made from forged steel for this heavy-duty application**

**Unique two latching system for a fully engaged coupler to a 2-5/16" hitch ball**

**Easy to operate lever latch**

**No coupler pin required**

**Includes mounting hardware to bolt to channel bracket and is setup for an industry standard 3" wide channel**



**Durable exterior grade black finish**

**Include all SAE required markings and are compliant to J684 standard**

**CTA-421 21,000 lb capacity 2-5/16" ball size black finish (channel bracket sold separately)**



**25K**

**CTA-425 25,000 lb capacity 2-5/16" ball size black finish with three hole mount design (channel bracket sold separately) Available special order**



# 15K Adjustable Coupler



**Precision cast coupler head for heavy duty strength**

**Includes mounting hardware to bolt to channel bracket and is setup for an industry standard 3" wide channel**

**Durable exterior grade black finish**

**Include all SAE required markings and are compliant to J684 standard**

**CTA-280 15,000 lb capacity 2-5/16" ball size black finish (channel bracket sold separately)**





# 14K Adjustable Coupler



**Stamped couplers are 100% ball fitted to ensure a proper fit when coupler is attached to the hitch ball**

**Durable exterior grade black finish**

**Coupler latch designs are setup for easy, yet safe coupling and uncoupling**

**Includes mounting hardware to bolt to channel bracket and is setup for an industry standard 3" wide channel**

**Include all SAE required markings and are compliant to J684 standard**



**CTA-400 14,000 lb capacity 2-5/16" ball durable black finish (channel sold separately)**

**CTA-400CB4 14,000 lb capacity 2-5/16" ball durable black finish (includes raw 3 position channel bracket)**

**CTA-400CB6 14,000 lb capacity 2-5/16" ball durable black finish (includes raw 5 position channel bracket)**



# 7K and 12.5K Sleeve Lock Adjustable Coupler



**Sleeve lock couplers feature solid shank and re-enforced sleeve collar for greater strength**

**Precision cast coupler head that is distinguished from other manufacturers. Its symmetric, straight with two corners and flat top shape allows for a self adjusting coupler head. This makes it easy, yet safe for coupling and uncoupling**

**Includes mounting hardware to bolt to channel bracket and is setup for an industry standard 3" wide channel**



**Durable exterior grade black finish**

**Include all SAE required markings and are compliant to J684 standard**

**CTA-196 7,000 lb capacity 2" ball size black finish (channel bracket sold separately)**

**CTA-296 12,500 lb capacity 2-5/16" ball size black finish (channel bracket sold separately)**



# Channel Brackets For Adjustable Couplers



**Raw channel brackets to work with 7K, 12.5K and 14K capacity adjustable couplers (.36" thick steel):**

**CTA-CB4 3 position channel bracket raw finish (bulk)**

**CTA-CB4X 3 position channel bracket raw finish laser cut (bulk)**

**CTA-CB4-CTN 3 position channel bracket raw finish (bulk/carton qtys)**

**CTA-CB4X-CTN 3 position channel bracket raw finish laser cut (bulk/carton qtys)**

**CTA-CB6 5 position channel bracket raw finish (bulk)**

**CTA-CB6X 5 position channel bracket raw finish laser cut (bulk)**

**CTA-CB6-CTN 5 position channel bracket raw finish (bulk/carton qtys)**

**CTA-CB6X-CTN 5 position channel bracket raw finish laser cut (bulk/carton qtys)**

**Raw channel brackets to work with 15K and 21K capacity adjustable couplers (.47" thick steel):**

**CTA-CB126 5 position channel bracket raw finish (bulk)**

**CTA-CB126X 5 position channel bracket raw finish laser cut (bulk)**

