



Gooseneck and King Pin Coupler Catalog



STRONG & RELIABLE
RAM
PREMIUM
SERIES

25K and 30K Self Latching Gooseneck Couplers

These RAM gooseneck couplers features a machined cast head to include a large funnel design to aid in hooking to hitch ball

Patent pending self latching coupling mechanism for easy hook up

Will hold in an open position for unhooking the hitch ball

30K round tube and square tube designs feature a welded belly band on bottom of outer tube for added strength


Include two set screws as well as load bearing pin to meet SAE J2638 standard

GCPN-25009 25,000 lb capacity, 2-5/16" ball pocket, 4.5" outer tube, .256" inner tube wall thickness, 8" adjustability, raw finish (round tube design)

GCPN-30009 30,000 lb capacity, 2-5/16" ball pocket, 4.5" outer tube, .295" inner tube wall thickness, 8" adjustability, raw finish (round tube design)

GCSQ-25009 25,000 lb capacity, 2-5/16" ball pocket, 4.5" outer tube, .256" inner tube wall thickness, 8" adjustability, raw finish (square tube design)

GCSQ-30009 30,000 lb capacity, 2-5/16" ball pocket, 4.5" outer tube, .295" inner tube wall thickness, 8" adjustability, raw finish (square tube design)

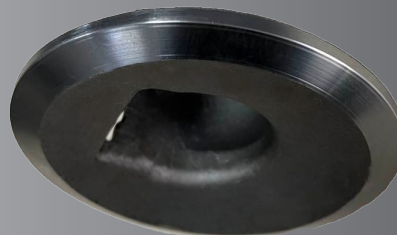

Large Funnel Design





25K and 30K Gooseneck Couplers



RAM Gooseneck couplers feature an exclusive one piece cast head design with a curved internal ball clamp bar for greater strength and better fit

Hidden spring latch mechanism within casting for ease of use and protection of moving parts

30K round tube design features a welded belly band on bottom of outer tube for added strength

25K and 30K square tube design features a welded belly band on bottom of outer tube for added strength

Include two set screws as well as load bearing pin to meet SAE J2638 standard

GCPN-25008 25,000 lb capacity, 2-5/16" ball pocket, 4.5" outer tube, .256" inner tube wall thickness, 29.2" retracted height, 8" adjustability, raw finish (round tube design)

GCPN-30008 30,000 lb capacity, 2-5/16" ball pocket, 4.5" outer tube, .295" inner tube wall thickness, 29.2" retracted height, 8" adjustability, raw finish (round tube design)

GCSQ-25008 25,000 lb capacity, 2-5/16" ball pocket, 4.5" outer tube, .256" inner tube wall thickness, 32" retracted height, 8" adjustability, raw finish (square tube design)

GCSQ-30008 30,000 lb capacity, 2-5/16" ball pocket, 4.5" outer tube, .295" inner tube wall thickness, 32" retracted height, 8" adjustability, raw finish (square tube design)

GCSQTW-30008 30,000 lb capacity, 2-5/16" ball pocket, 4.5" outer tube, .295" inner tube wall thickness, 32" retracted height, 7" adjustability, raw finish (top wind square tube model)





40K Gooseneck Coupler



RAM Gooseneck couplers feature an exclusive one piece cast head design with a curved internal ball clamp bar for greater strength and better fit

Hidden spring latch mechanism within casting for ease of use and protection of moving parts

40K square tube design features two welded belly bands on bottom of outer tube for superior strength

Reinforced inner tube for added strength

Includes two set screws as well as two load bearing pins to meet SAE J2638 standard

Three position adjustability with total adjustment of 5.33"

Lanyard pin design to lock ball clamp in place

Trailer gusset design must meet RAM specifications (see installation instructions in support section of this website)

GCSQ-40000 40,000 lb capacity, 3" ball pocket, 4.5" outer tube, 29" retracted height, raw finish

40K King Pin insert also available special order (KP5G-Q40IP)

40K King Pin full coupler also available special order (KP5G-Q40)



25K and 30K King Pin Couplers



**30K Round
Tube**

KING PIN GOOSENECK COUPLERS design features king pin head welded to gooseneck inner tube for added strength

- **Available both in round tube and square tube designs**
- **Available in both 25K and 30K capacities**
- **30K designs include a welded belly band at the bottom of the outer tube for added strength**
- **All king pin models include load bearing pin design to meet SAE J2638 standard**
- **All king pin models have an 8" height adjustment**



**30K Square
Tube**

KP5G-R25 25K ROUND TUBE KING PIN GOOSENECK

KP5G-Q25 25K SQUARE TUBE KING PIN GOOSENECK

KP5G-R30 30K ROUND TUBE KING PIN GOOSENECK

KP5G-Q30 30K SQUARE TUBE KING PIN GOOSENECK